


## TECHNICAL SPECIFICATION




HU  
O2

### REAR ELEVATION

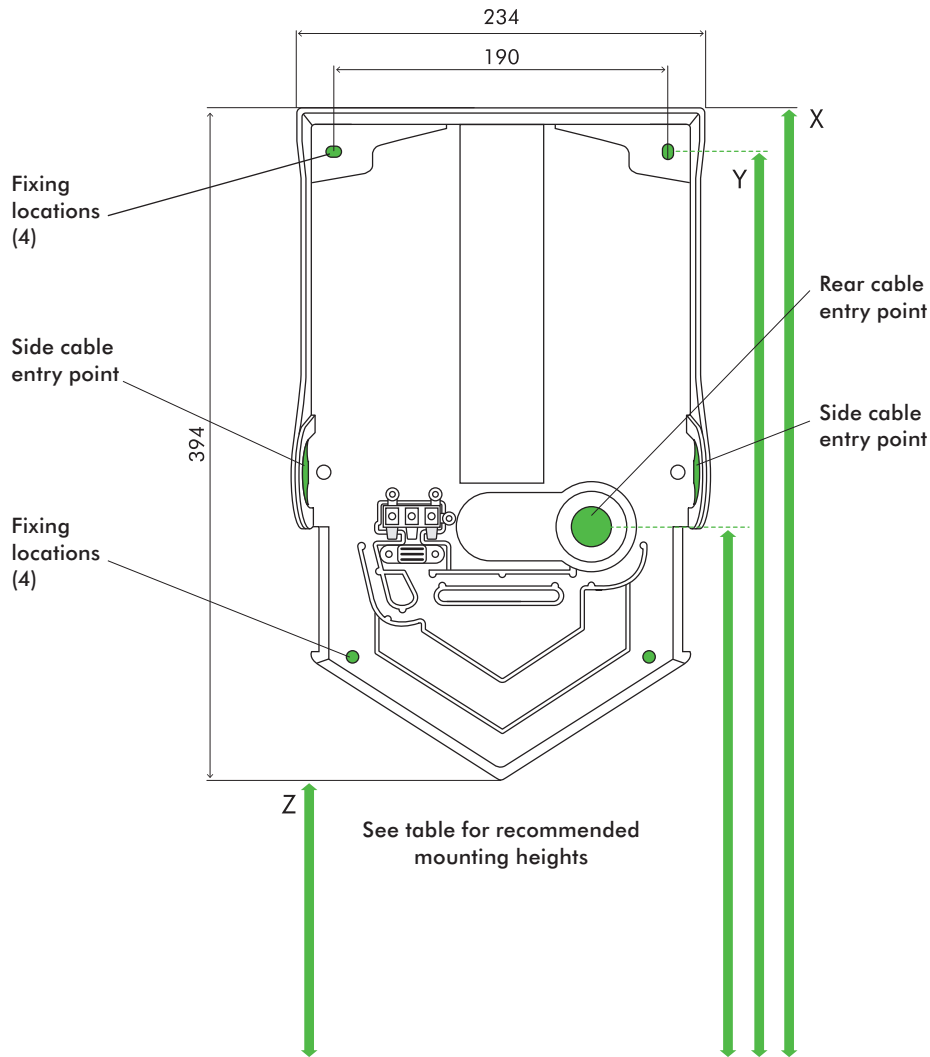

### SIDE ELEVATION

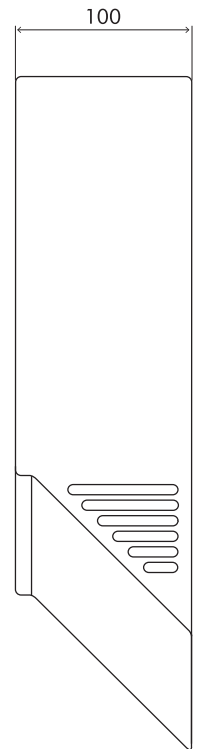

All dimensions shown in mm (+/-5 mm)

FLOOR

#### Recommended installation heights from floor

|                   |           |           |          |
|-------------------|-----------|-----------|----------|
| Male              | X 1324 mm | Y 1300 mm | Z 930 mm |
| Female            | X 1289 mm | Y 1265 mm | Z 895 mm |
| Child or disabled | X 1074 mm | Y 1050 mm | Z 680 mm |
| Child 5-8         | X 952 mm  | Y 928 mm  | Z 558 mm |
| Child 8-11        | X 1052 mm | Y 1028 mm | Z 658 mm |
| Child 11-14       | X 1132 mm | Y 1108 mm | Z 738 mm |

#### Machine dimensions

Height 394 mm Width 234 mm Depth 100 mm

#### Minimum clearance

220mm clearance either side and 30mm above machine.

#### Cable entry point from floor

|                   |         |
|-------------------|---------|
| Male              | 1089 mm |
| Female            | 1054 mm |
| Child or disabled | 839 mm  |
| Child 5-8         | 717 mm  |
| Child 8-11        | 817 mm  |
| Child 11-14       | 897 mm  |

For more information:  
Visit: [www.dyson.co.za](http://www.dyson.co.za)  
Call: 021 670 4704

# dyson airblade V

HU  
02

## Electrical

Input voltage/Frequency: 200-240 V 50&60 Hz

Standby power consumption: Less than 0.5 W

Motor specification: 1,000 W digital brushless motor

Heater type: None

## Construction

Fascia: Polycarbonate

Antibacterial coating type:

HU02 (Sprayed Nickel) contains antibacterial additive in paint.

HU02 (White) contains antibacterial moulded additive.

Can help prevent the growth of bacteria.

Back plate mounting bracket: ABS/PBT Plastic

Exterior screw type: Anti-tamper 4 mm Pin-Hex

Water ingress protection to IP24

## Filter

HEPA filter (Glass fibre and fleece prelayer)

99.9% of particles captured

## Operation

Touch free capacitive sensor activation

Hand dry time measurement: 12 seconds

(Measurement based on NSF Protocol P.335)

Sound power level: 79 dB(A)

Sound pressure level @ 2 m: 63 dB(A)<sup>1</sup>

Operation lock-out period: 30 seconds

Airspeed at aperture: 690 km/h / 430 mph

Maximum altitude: 2,000 metres / 6,561 ft.

## Logistics

Single unit order code:

Malaysia: Sprayed Nickel 307735-01, White 307734-01

South Korea: Sprayed Nickel 307596-01, White 307595-01

Rest of world: Sprayed Nickel 307170-01, White 307169-01

Unit barcode:

Malaysia: Sprayed Nickel 5025155025871, White 5025155025864

South Korea: Sprayed Nickel 5025155025833, White 5025155025826

Rest of world: Sprayed Nickel 5025155025796, White 5025155025710

Net weight: 2.9 kg / 6.17 lbs

Packaged weight: 4.0 kg / 8.81 lbs


Packaged dimensions:

(H)145 × (W)455 × (D)274 mm / (H)5<sup>3</sup>/<sub>4</sub>" × (W)17<sup>7</sup>/<sub>8</sub>" × (D)10<sup>3</sup>/<sub>4</sub>"

## Standard guarantee

5 year guarantee


<sup>1</sup>Sound pressure measured at 2 m distance, in a semi-anechoic chamber.

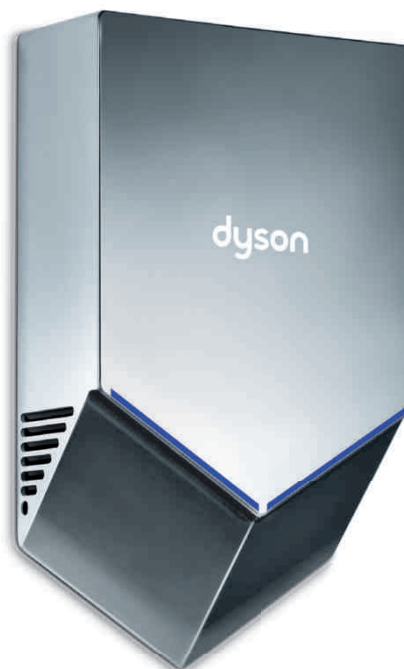

## Product range

Sprayed Nickel

White



The Carbon label is a trademark of the Carbon Trust.

The NSF logo is the registered trademark of NSF International.

Quiet Mark is a registered trademark of the Noise Abatement Society.

For more information:

Visit: [www.dyson.co.za](http://www.dyson.co.za)

Call: 021 670 4704